
GENERAC® HOME STANDBY GENERATORS





Easily maintained and always ready to go, a home standby generator is there to protect you and your family.

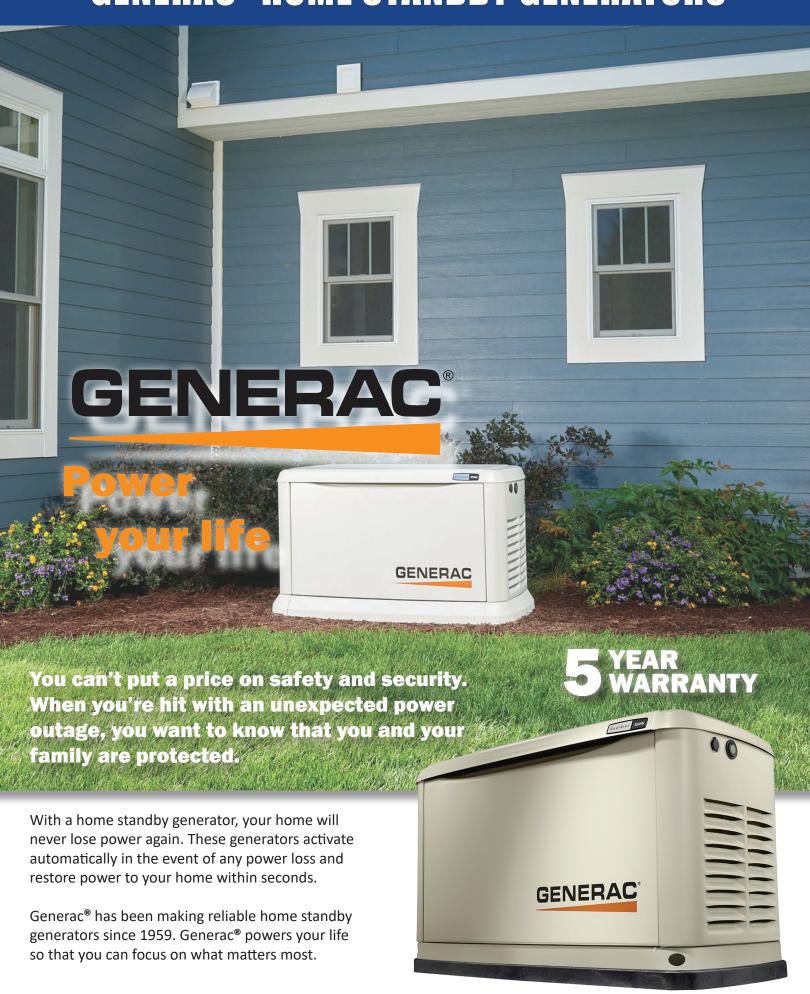

We can assist you with selecting the right model for your specific needs, give us a call today!

SPECIFICATIONS (LP/NG)	10/9kW	13/13kW	16/16kW	20/18kW	22/19.5kW
Generator Only Model and Part Number	LP-7171	LP-7173	LP-7176	LP-7038	LP-7042
Generator / Select Circuit Switch Model and Part Number	LP-7172 100 Amp Switch	LP-7174 100 Amp Switch	LP-7177 100 Amp Switch	N/A	N/A
Generator / 200 Amp Service Rated Load Shedding Smart Switch Package Model and Part Number	N/A	LP-7175	LP-7178	LP-7039	LP-7043
Voltage (Single Phase)	120/240V				
Amps @ 240V LPG	41.7	54.2	66.6	83.3	91.6
Amps @ 240V NG	37.5	54.2	66.6	75	81.3
Engine/Alternator RPM	3600/3600				
Engine	Generac G-Force				
Engine Displacement	460cc	816cc 999cc			
Fuel Consumption @ 1/2 Load NG cu. ft/hr	101	154	182	204	228
Fuel Consumption @ Full Load NG cu. ft/hr	127	225	245	301	327
Fuel Consumption @ 1/2 Load LPG cu. ft/hr (gal/hr)	36 (0.97)	56 (1.54)	62 (1.70)	86 (2.37)	92 (2.53)
Fuel Consumption @ Full Load LPG cu. ft/hr (gal/hr)	54 (1.48)	90 (2.45)	109 (2.99)	129.6 (3.56)	142.1 (3.90)
Quiet-Test Mode	Yes				
db(A) at Exercise	57	55	55	55	57
db(A) at Normal Operating Load	61	65	65	67	67
Enclosure	Aluminum				
Enclosure Color	Bisque				
Warranty	5-Year Limited				
Dimensions (L" x W" x H")	48 x 25 x 29				
Weight (lbs.)	338	385	420	448	466
Standard with Mobile Link	Yes				













